


M-DL-DXLINK fitting note

M-DL-DXLINK (DX Link) is one of several audio networking options that can be fitted to an Allen & Heath dLive I/O Port. It provides 4 DX Link ports, each carrying 32x32 channels of 96kHz audio, that can be used to connect to dLive DX expander units in either Parallel or Redundant mode.

 M-DL-DXLINK requires dLive firmware V1.6 or higher.

Fitting the card

1. Switch the dLive system OFF.
2. Remove the 4 screws securing the I/O Port blank panel to the dLive MixRack or Surface.
3. Slide the card into the slot and press it firmly into the mating connector.
4. Secure the card by tightening the 4 captive thumb screws.

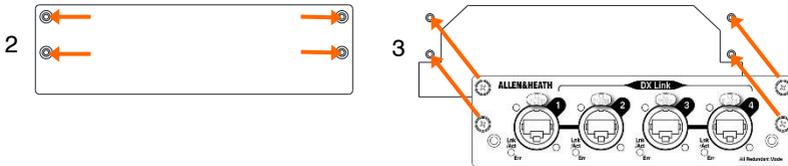

Settings and routing

Use the dLive I/O screen to patch signals from or to the I/O Ports.

Use the **MixRack / Audio / I/O Port** or **Surface / Audio / I/O Port** screen as appropriate to access redundancy options for the DX Link card. Redundancy can be switched ON or OFF globally per DX Link module.


In **Redundant** mode, 1 DX32, DX168 or DX164-W expander can be connected to each pair (1/2 & 3/4) of DX Link ports using 2 Cat5e or higher cables per redundant connection.

In **Parallel** mode, 1 DX32 or up to 2 DX168/DX164-W expanders (in Cascade mode) can be connected to each DX Link port allowing up to 128 remote inputs and 64 remote outputs to be added to the dLive system per DX Link module.

Basic channel mapping is shown below, for more information please refer to the dLive Firmware Reference Guide and the DX System Guide.

Parallel	I/O Port Channels	Redundant	I/O Port Channels
DX Link 1	01-32	DX Link 1&2	01-32
DX Link 2	33-64		
DX Link 3	65-96	DX Link 3&4	33-64
DX Link 4	97-128		

Front panel

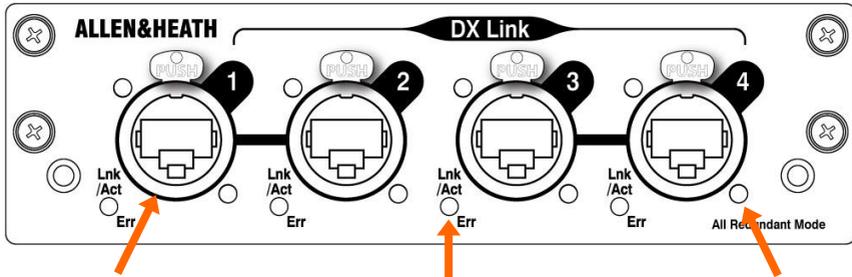

DX Link 1-4

etherCON connectors for Cat5e or higher cables up to 100m.

Lnk/Act LEDs

Flash yellow for Link activity.
Illuminates red for stream errors.

All Redundant Mode LED

Illuminates when global redundancy is ON.

CAT5e/CAT6 Cables

Allen & Heath can provide the following recommended cables for use with the DX Link module – contact your A&H dealer for more information:

CAT5e

- AH9650-A** 100m drum of Etherflex cable with Neutrik EtherCON locking connectors
- AH7000-A** 80m drum of Etherflex cable with Neutrik EtherCON locking connectors
- AH9981-A** 50m drum of Etherflex cable with Neutrik EtherCON locking connectors
- AH9651-A** 20m Etherflex cable with Neutrik EtherCON locking connectors
- AH9997-A** 2m cable with Neutrik EtherCON locking connectors

CAT6

- AH10887-A** 100m drum of CAT6 cable with Neutrik EtherCON locking connectors
- AH10886-A** 80m drum of CAT6 cable with Neutrik EtherCON locking connectors
- AH10885-A** 50m drum of CAT6 cable with Neutrik EtherCON locking connectors
- AH10884-A** 20m drum of CAT6 cable with Neutrik EtherCON locking connectors

Read the Safety Instructions Sheet included with the product and the information printed on the panel before operating.

A limited one year manufacturer's warranty applies to this product, the conditions of which can be found at: www.allen-heath.com/legal

By using this Allen & Heath product and the software within it you agree to be bound by the terms of the relevant End User Licence Agreement (EULA), a copy of which can be found at: www.allen-heath.com/legal

Register your DX Link with Allen & Heath online at: <http://www.allen-heath.com/support/register-product/>

Check the Allen & Heath website for the latest documentation and software updates

ALLEN & HEATH

Copyright © 2017 Allen & Heath. All rights reserved