

The NX-100S Network Audio Adaptor can transmit high-quality audio signals and such control data as control input data over IP networks, such as LAN or Internet, in real time. It is especially useful when transmitting audio signals to remote locations, as Internet use keeps running costs lower than the use of dedicated lines. With the use of an optional rack mounting bracket, it can be mounted in an EIA Standard rack




Article number: NX-100S W

## Specifications

Power source	24 V DC (AC adapter AD-246 (optional) or equivalent)
Power consumption	7 W (when AD-246 (optional) is used)
Current consumption	0,2 A
Control input	8 (no-voltage make contact) (12 V DC, 10 mA)
Control output	8 (open collector, 30 V DC, 50 mA)
Network	10BASE-T/100BASE-TX, Auto-negotiation
Connection	Network: RJ45 jack, audio in/out: 2x 3-pin removable screw terminal, control in/out: 2x 9-pin removable screw terminal, power: DC power jack
Cable length	100,00 m
Audio input	1 channel, balanced, sensitivity -58/0 dBV selectable, phantom power selectable
Audio output	1 channel, balanced, 0 dBV, min. 600 Ω
Indicator	Link/Act, FD/COL, Status, Error, Run, Reset
Dimensions (W x H x D)	210 x 44,7 x 188 mm
Dimensions (ø x D)	x 188 mm
Finish	Steel plate, 30% gloss, black,
Operating humidity	Under 90 % RH (no dew condensation should be produced)
Operating temperature	0°C to +40°C

Appearance

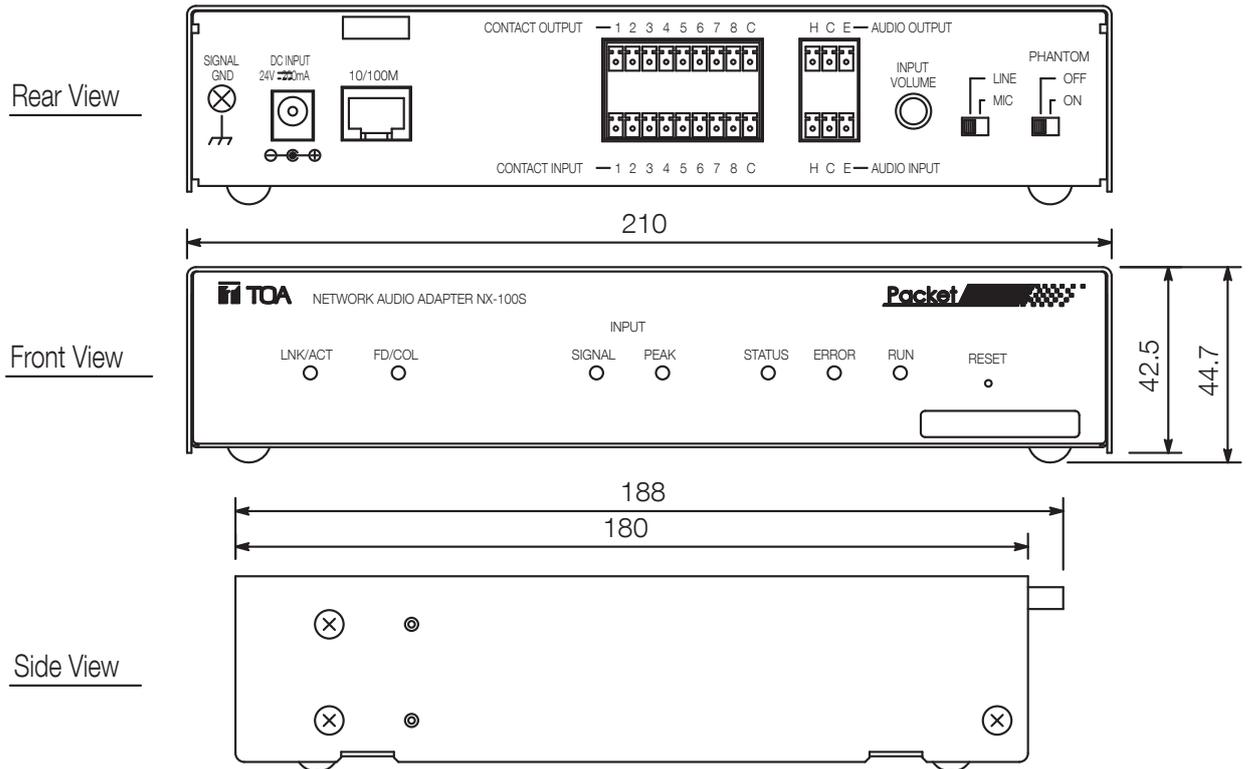

UNIT:mm SCALE:1/2