

S5.5-RX-B1

The S5.3-RX is a true diversity tuner. This features user-friendly operability, and employ an easy-to-read LCD display. Also, it is possible to perform the system settings through infrared communications, and monitor the system status using the supplied PC software.




Order no: S5.5-RX-B1EUQ

Specifications

Power supply	300 mA, 11 – 18 V DC
Diversity principle	True diversity (dual receiver)
Frequency response	60 Hz - 20 kHz
Receiving frequency	722 - 752 MHz
Automatic frequency scan	Yes
Receiver sensitivity	< 1 μ V/12 dB SINAD
IR-Synchronization	Yes
Antenna inputs	2 x BNC (50 Ω)
Nominal output level	Mic/line selectable, mic: -27 dBV, line: +13 dBV
Audio output	XLR balanced (mic/line selectable), 1/4" jack unbalanced
Selectable frequencies (combined)	1400 (Presets: 10 banks with max., 24 frequencies each)
S/N ratio	110 dB (A)
Dimensions (W x H x D)	210 x 46 x 210 mm
Dimensions (ϕ x D)	x 210 mm
Finish	Metal,


S5.5-RX-B1

Appearance

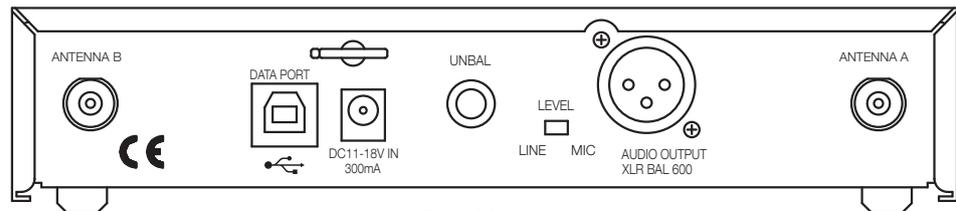


Rear View

210 [8.27"]

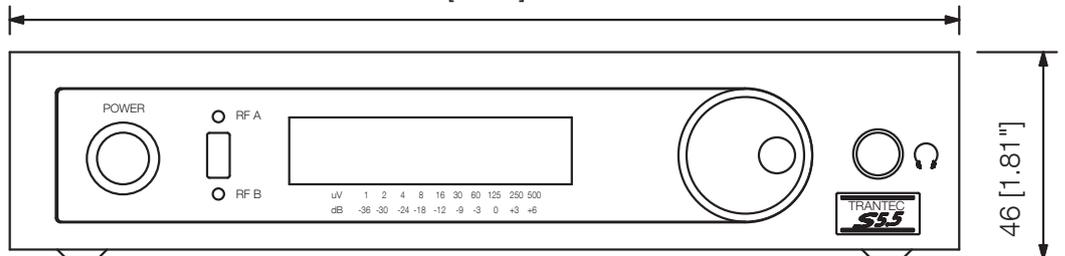

Front View

210 [8.27"]

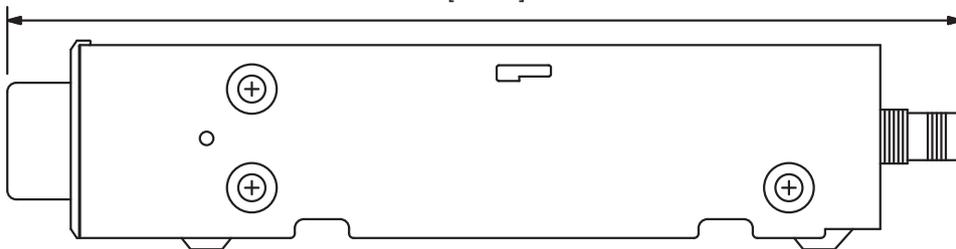

Side View

UNIT:mm

SCALE:1/2