

F 12XR

12-CHANNEL MIXING CONSOLE WITH MULTI-FX & RECORDING

DESCRIPTION

The F 12XR features 6 mic preamp inputs, 4 mono line inputs, 4 stereo line inputs plus multi-FX and recording via USB port, with balanced main output (Stereo XLR + TRS) and 4 single control compressors. The mono channels are provided with 3-band EQ and stereo with 2-band. The mixer features 16 PRO DSP internal presets and 2 aux sends (1 pre, 1 pre/post fader). It also features a stereo output BUS and 60mm faders.



FEATURES

- 6 Mic preamp inputs, 4 mono Line inputs
- 4 stereo line inputs
- PRO DSP FX onboard with 16 presets
- Stereo recording and playback via USB port
- 4 single control compressors
- Balanced main output +28 dB (Stereo XLR + TRS)
- One Stereo output bus and 2 Aux sends (1 pre, 1 pre/post)
- 60 mm faders
- Internal universal power supply
- Designed and engineered in Italy

TECHNICAL SPECIFICATIONS

Electronic specifications	Frequency Response: THD+N, 20dB gain, 0dBu out	20 Hz ÷ 20 kHz <0,02
---------------------------	---	-------------------------

Inputs	Mic:	6
	Gain Range:	0 dB ÷ -50 dB
	Mic Inputs Impedance:	14 kohm
	Low Cut:	80 Hz
	Phantom Power +48V:	Yes
	Mono Line:	4
	Gain Selection:	20 dB ÷ -30 dB
	Line Input Impedance:	21 kohm
	HI-Z Line Inputs:	1
	HI-Z Line Inputs Impedance (Mohm):	1 Mohm
	Stereo Line:	4
	Gain Selection:	20 dB ÷ -30 dB
	Stereo Line Input Impedance (kOhm)	15 kohm

Outputs	Main MIX:	1
	Control Room:	Yes
	FX Send:	1
	AUX Send:	1
	AUX Output:	2
	Group Out:	1
	Phones:	1

Outputs specifications	Main Out Level:	28 dBu
	Aux Out Level:	28 dBu
	Group Out Level:	28 dBu
	Phones Out impedance (ohm):	150 ohm

Compressors	RCF Compressors:	n° 4 Single Control Compressors on Channels 1 to 4
-------------	------------------	--





EQ	Input Channels EQ:	2 Shelving 1
	Description:	High: +/-15 dB @ 10 kHz Shelving Mid: +/-15 dB @ 1,250 kHz Bell Low: +/-15 dB @ 100 Hz Shelving

Auxiliary sends	AUX:	1 PRE/POST
	FX POST:	1

Internal Effects	Send Effects:	1
USB audio	Type:	B
	Play trk:	2
	Rec trk:	2
	Supported Sample Rate:	44.1, 48.0
Other features	Footswitch:	Yes
Electrical specifications	Power supply:	Internal
	Voltage requirements:	100 V - 240 V
	Power consumption (MAX):	24 W
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Metal
	Color:	Black
Size	Height:	97 mm / 3.82 inches
	Width:	373 mm / 14.69 inches
	Depth:	355 mm / 13.98 inches
	Weight:	4.5 kg / 9.92 lbs
Shipping informations	Package Height:	140 mm / 5.51 inches
	Package Width:	400 mm / 15.75 inches
	Package Depth:	425 mm / 16.73 inches
	Package Weight:	5.5 kg / 12.13 lbs

PART NUMBER

- | | | |
|-------------------|-------------------|-------------------|
| • 17140098 | • 17140097 | • 17140095 |
| F 12XR | F 12XR | F 12XR |
| JP | UK | US |
| EAN8024530016746 | EAN 8024530016739 | EAN 8024530016715 |
| • 17140090 | | |
| F 12XR | | |
| EAN 8024530016159 | | |

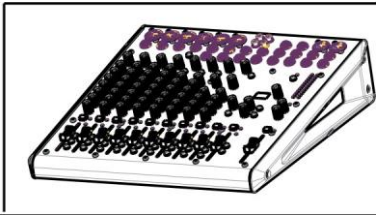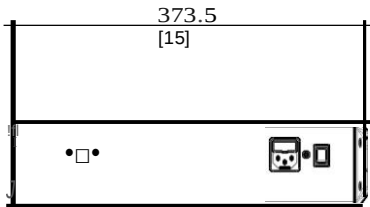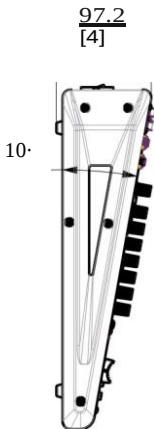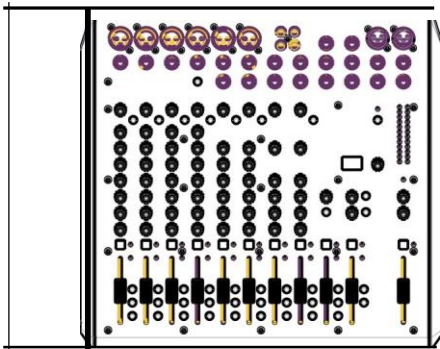

MIXER F I2XR 90-240 V

REV.
A