




HYDRO BEAM X2

The ADJ Hydro Beam X2 is an IP65 rated professional moving head fixture with a 370W LL Osram Sirius HRI discharge lamp that produces a razor sharp 3-degree beam.

Its IP65 outdoor rating protect the fixture from dust, sand, moisture & liquid. Includes a 8-facet linear prism, 8-facet circular prism, frost filter, plus rotating and removable GOBOs.

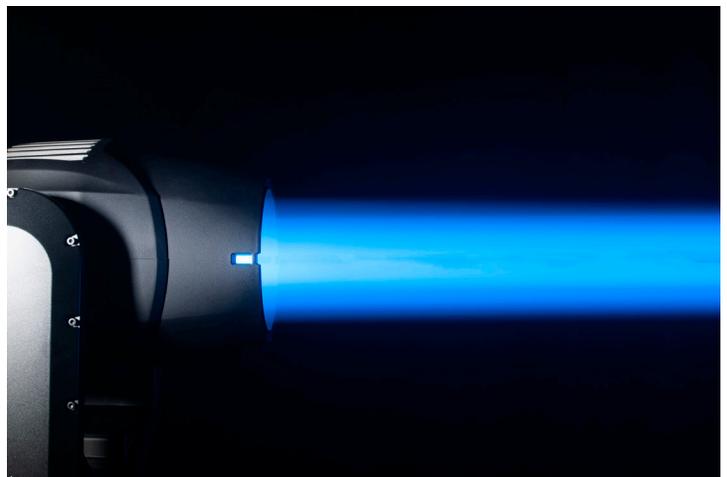



The ADJ Hydro Beam X2 is an IP65 rated professional moving head fixture with an Osram Sirius HRI 370W LL (Average Rated Life 1500 hours) discharge lamp that produces a razor sharp 3-degree beam.

With robust construction and IP65-ratings, the Hydro Beam X2 is designed for both indoor or outdoor use. Its durable casing protects it from dust, sand, moisture and liquids, making it ideal for use in all situations from dusty deserts in California to rainy fields in England. Perfect for festivals and outdoor events, as well as installation in open-air clubs and other outside entertainment spaces, this groundbreaking fixture offer an extended operational life and reduced maintenance requirement due to their sealed casing design.

The Hydro Beam X2 has a wealth of features such as linear motorized focus, 8-facet circular prism with overlay, 8-facet linear prism with overlay, glass and metal GOBOs that rotate and are replaceable, 3 GOBO reducers, and an independent frost filter for wash effects.

Its fitted with 5-pin DMX In/Out and locking power In/Out connectors to daisy chain power. All connections are IP65 rated with rubber protective covers.

The Hydro Beam X2 fits into ADJ DRC MHX road case.

The ADJ Hydro Series was awarded the 2019 PLSN Gold Star Award for "Best Range of Waterproof Fixtures."



HYDRO BEAM X2



LIGHT SOURCE:

- Lamp: Osram Sirius HRI 370W LL Long Life Discharge (Average Rated Life 1500 hours)
- Color Temperature : 8000K
- CRI: 70
- Beam Angle: 3-degrees

FIXTURE FEATURES:

- IP65 rated – protects from dust, sand, moisture, liquid
- Linear motorized focus
- Independent frost filter (wash effect)
- 0-100% smooth dimming
- Various strobe speeds
- Includes omega brackets
- Wifly EXR wireless DMX
- 8-facet circular prism
- 8-facet linear prism
- Antenna Range: 98.42ft (30m)

COLOR WHEEL:


- 11 colors + 3200K & 5600K + one Quad Color + open

GOBO WHEEL:


- 1 GOBO Wheel with 5 glass GOBOs, 3 metal GOBOs and 3 GOBO reducers + open
- All GOBOs rotate and are removable
- GOBOs outside diameter: 9.8mm
- GOBOs image diameter: 6.5mm
- GOBOs Thickness: 1.1mm Boro



COLOR WHEEL

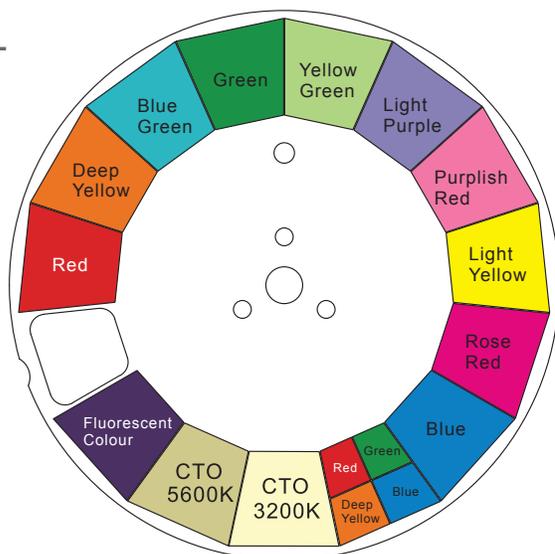

GOBO WHEEL

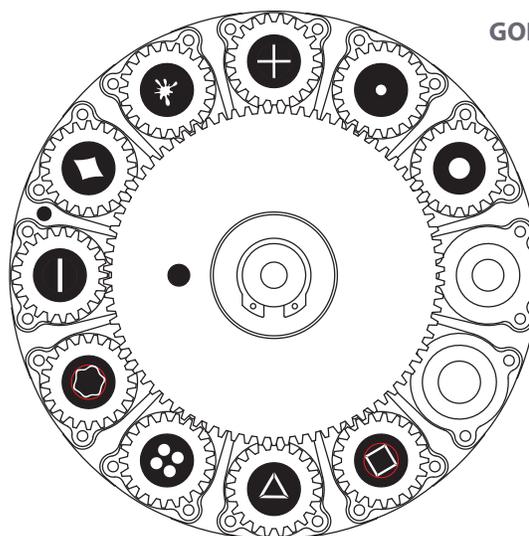

HYDRO BEAM X2



CONSTRUCTION:

- Display: OLED display
- Data In/Out: 5-pin DMX IP65 (with rubber protective covers over connections)
- Power In/Out: locking IP65 (with rubber protective covers over connections)
- Protection Rating: IP65
- All metal case design

CONTROL:

- 2 DMX Channel Modes: 15/17 Channels
- Control Mode: DMX512, RDM (Remote Device Management)
- With Wired Digital Communication Network

PAN/TILT:

- Pan/Tilt: 540/270
- Pan/Tilt Resolution; 16-bit

ELECTRICAL:

- Power voltage: AC100-240V, 50/60Hz (Multi-voltage)
- Power consumption: 540W

DIMENSIONS & WEIGHT:

- Dimension: 15.8" (L) x 16.5" (W) x 24.8" (H) / 401 x 419 x 629 mm
- Weight: 64 lbs. / 29kg.

OPERATING TEMPERATURE:

- Minimum operating temperature: -4°F (-20C)
- Maximum operating temperature: 104°F (40C)

CERTIFICATIONS:

- cETLus Approved (Control #4000358)

Specifications and documentation subject to change without notice



.IP65 Rated DMX & Power Sockets with Protective Rubber Covers

