

IR-500R

INFRARED WIRELESS RECEIVER

The IR-500R infrared wireless receiver is designed for use with the IR-702T infrared wireless tuner. It can be mounted to a wall or an electrical box.



Article number: IR-500R Y
Alternative products: IR-510R, IR-520R


Specifications

Power source	24 V DC (supplied from IR-702T)
Current consumption	40,0 mA
Wavelength	870 nm
Carrier frequency	Channel A: 3.100 MHz / Channel B: 3.350 MHz
Reception angle	Vertical: 80° (up to 30° movable downward), Horizontal: 80° (up to 30° movable left or right)
Reception area	Approx. 15 m (8 m radius) in a space without any obstacles
Connection terminal	75 Ω, BNC jack
Dimensions (W x H x D)	70 x 120 x 72 mm
Dimensions (ø x D)	x 72 mm
Finish	Polycarbonate, ABS resin, black, off-white (RAL 9010 or equivalent).

IR-500R

INFRARED WIRELESS RECEIVER

Appearance

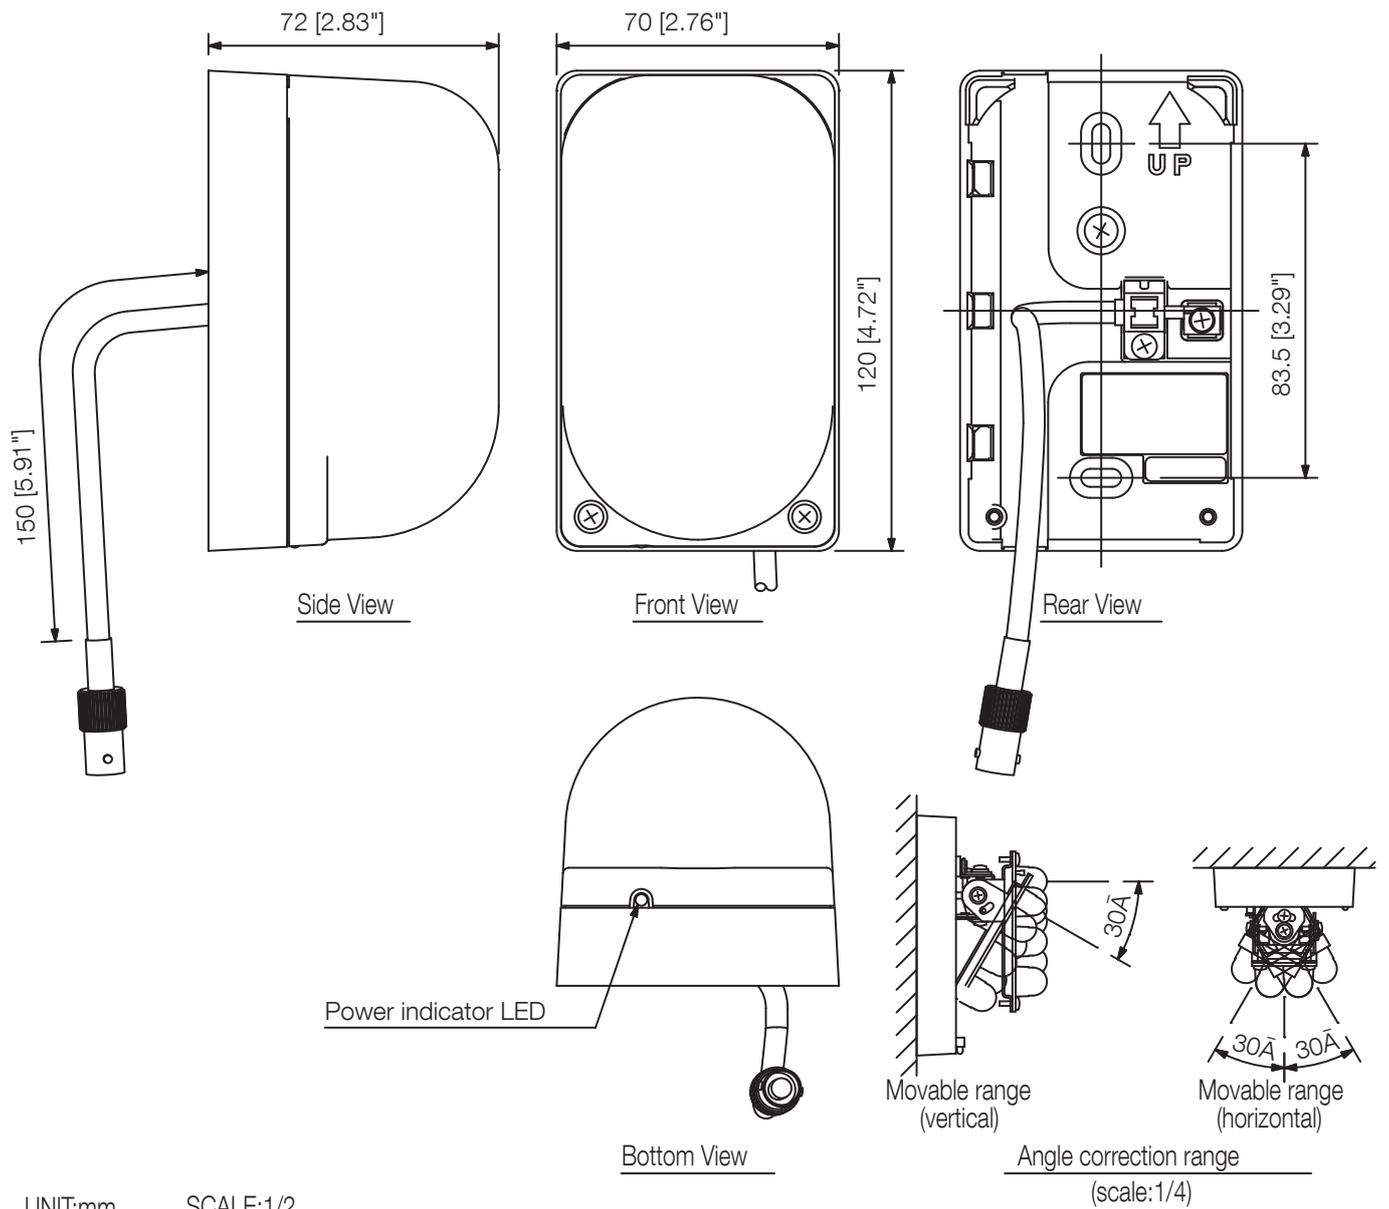

UNIT:mm

SCALE:1/2