

# DESONO™ KUBO3T

## FULL RANGE 3-INCH SURFACE MOUNT LOUDSPEAKER



### FEATURES

- Zoom Certified
- High speech intelligibility coupled with full-range music reproduction
- Stylish yet subtle design; blends well in many environments
- Can be mounted to track lighting rails through innovative optional accessories
- IP40 rated
- Tap switch allows for 70V/100V or 16Ω low impedance operation
- Loudspeaker overload protection for 24/7 failsafe operation

### APPLICATIONS

Retail Outlets · Bars and Restaurants · Hotels · Cafés and Bistros · Kiosks · Corporate Meeting Rooms · Sound Masking

### DESCRIPTION

The Desono KUBO3T full-range 3" surface mount loudspeaker is the result of increasing demand for more stylish yet subtle audio products. Designed to blend into any background, the KUBO3T delivers crystal clear sound for all your background music needs, while the bass reflex port provides a fast and dynamic bass response.

Available in black or white, the 140° range of motion allows the KUBO3T to be installed on walls or ceilings in either horizontal or vertical orientation. The audio connections and bracket hardware are hidden under magnetically attached end caps, providing a refined look for high visibility locations. For retail applications, optional accessories are available that allow the KUBO3T to be attached directly to many types of track lighting rails.

The KUBO3T utilizes a 4-position switchable transformer ranging from 1.25W to 10W with low-impedance bypass for constant-voltage operation, making it an excellent choice for large areas of BGM.

The Desono KUBO3T is an excellent choice for indoor audio applications that demand superior speech intelligibility and full range music reproduction, as well as open deck sound masking applications.

### TECHNICAL SPECIFICATIONS

Operating Mode	Passive	
Operating Environment	Indoor	
Operating Range (-10dB)	115 Hz to 20 kHz	
Nominal Beamwidth (H x V)	100° x 100°	
Transducers	1 x 3" (76 mm) polypropylene cone	
Continuous Power Handling @ Nominal Impedance	20V	25W @ 16Ω (100W peak)
Nominal Sensitivity @ 1m	@ 1W 86 dB	@ 2.83V 83 dB
Nominal Maximum SPL @ 1m	Peak 106 dB	Continuous 100 dB
Transformer	70V: 10W, 5W, 2.5W, 1.25W 100V: 10W, 5W, 2.5W	
Protection	3-step self-resetting protection	
Recommended Amplifiers	25W - 50W @ 16Ω (20V - 28V)	

### PHYSICAL

Input Connection	(2x) 2-way Euroblock connectors for daisy-chaining; connectors accept up to 12 AWG (2.5 mm <sup>2</sup> ) conductors
Controls	Power tap / low impedance selector switch
Mounting Provisions	U-bracket
Environmental	IP40 per IEC 60529
Dimensions H x W x D	125 mm x 131 mm x 109 mm (4.9" x 5.2" x 4.3")
Weight	1.2 kg (2.6 lbs)
Finish	Refer to the Technical Drawings (page 3)
Accessories (included)	U-bracket; safety cable

### OPTIONS


Accessories	LRABAS(-BL/-W): Basic light rail adaptor, black or white LRAPRE(-BL/-W): Premium light rail adaptor, black or white
-------------	--

*Biamp strives to improve its products on a continual basis. Specifications are therefore subject to change without notice. Data presented on this spec sheet represents the basic performance specifications for the model. For a detailed analysis of this loudspeaker's performance, please download the GLL file from our website: [biamp.com](http://biamp.com)*


# DESONO KUBO3T

FULL RANGE 3-INCH  
SURFACE MOUNT LOUDSPEAKER


## FREQUENCY RESPONSE (dB SPL)

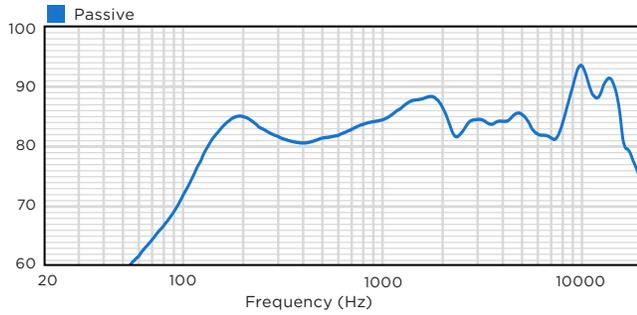


## HORIZONTAL OFF-AXIS RESPONSE (dB)

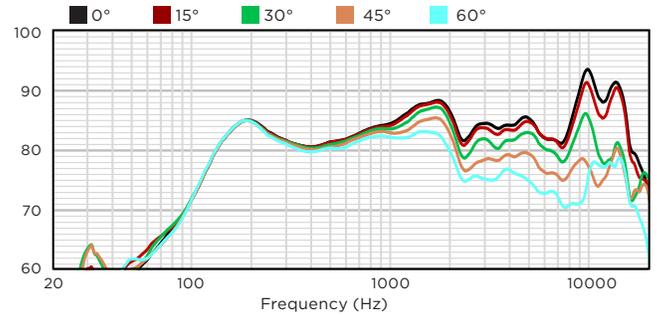


## IMPEDANCE (Ohms)

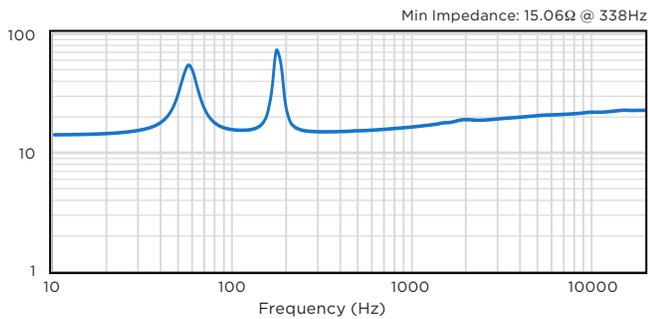

## VERTICAL OFF-AXIS DOWN RESPONSE (dB)

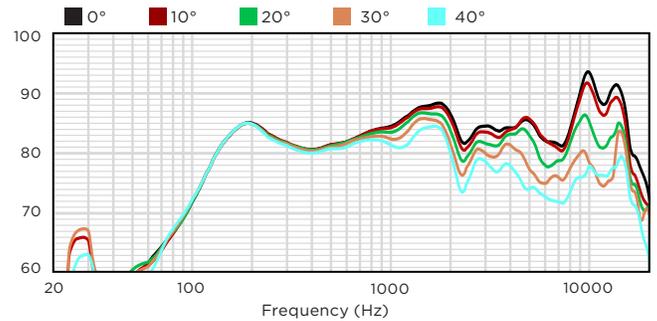

## BEAMWIDTH (Degrees)

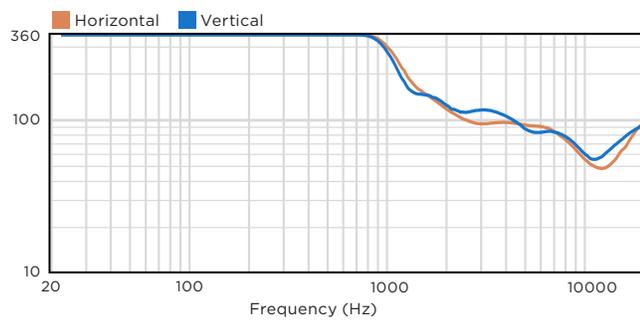

# DESONO KUBO3T

FULL RANGE 3-INCH  
SURFACE MOUNT LOUDSPEAKER

## TECHNICAL DRAWING / DIMENSIONS / FINISH

**H x W x D**  
125 mm x 131 mm x 109 mm  
(4.9" x 5.2" x 4.3")

**Unit Weight**  
1.2 kg (2.6 lbs)

**Grille:**  
Steel  
White (RAL 9016) or Black (RAL 9011) finish

**Enclosure / Finish**  
ABS plastic, matte finish, White or Black

