NX 932-A

PROFESSIONAL ACTIVE SPEAKER

DESCRIPTION

NX 932-A is masterfully engineered from the ground up to deliver stellar audio performance for sound providers, small bands and DJs. The combination of a 3″ titanium/neodymium compression driver, 12″ woofer - two-channel 2,100W amplifier, and the constant directivity True Resistive Waveguide produces coherent 100° x 70° coverage for the listening area with up to 132 dB SPL, distortion-free sound. Used as a stand-alone speaker for a FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 932-A blends high performance and reliability in a compact package. Merging RCF proprietary FiRPHASE and Bass Motion Control DSP processing, perfectly tuned for each model, the audience will experience absolute sound clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.

FEATURES

- Up to 132 dB Sound Pressure Level
- 2100W Class-D Bi-Amplification
- 45-20000 Hz linear frequency response
- 3″ Titanium/Neodymium Compression Driver
- 12″ Woofer
- FiRPHASE zero degrees phase technology
- Bass Motion Control woofer excursion management
- Six M10 and four Quick Lock rigging points

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	45 Hz ÷ 20000 Hz
	Max SPL @ 1m	132 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.4" neo, 3.0" v.c
	Woofer	1 x 12", 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	700Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Linear, Boost, Stage, Volume
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Hardware	2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear 2 each side quick lock pin seat
	Handles	1 x Side
	Pole mount/Cap	Yes
	Color	Black, White
Size	Height	620 mm / 24.41 inches
	Width	362 mm / 14.25 inches
	Depth	405 mm / 15.94 inches
	Weight	22.9 kg / 50.49 lbs
Shipping information	Package Height	666 mm / 26.22 inches
	Package Width	461 mm / 18.15 inches
	Package Depth	416 mm / 16.38 inches
	Package Weight	26 kg / 57.32 lbs

RCF products are continually improved. All specifications are therefore subject to change without notice.

PART NUMBER

- **13000874**
  NX 932-A W
  220-240V, White
  EAN 8024530022020
- **13000873**
  NX 932-A W
  100-120V, White
  EAN 8024530021870
- **13000767**
  NX 932-A
  100-120V, Black
  EAN 8024530021290
- **13000766**
  NX 932-A
  220-240V, Black
  EAN 8024530021115

RCF products are continually improved. All specifications are therefore subject to change without notice.

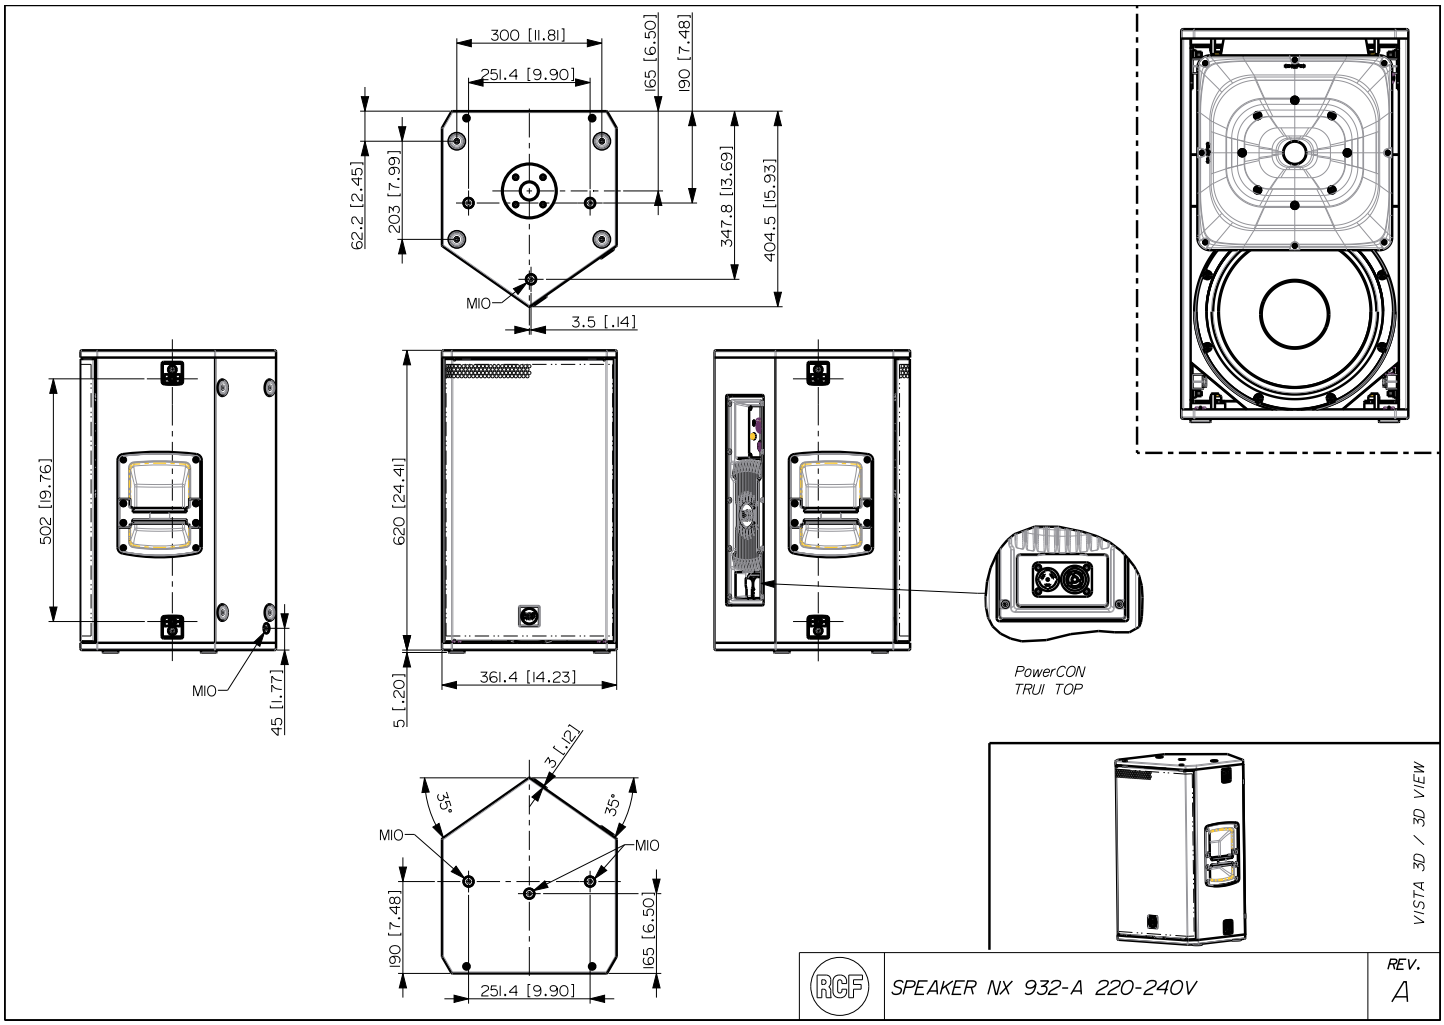
300 [11.81]
251.4 [9.90]
165 [6.50]
190 [7.48]
62.2 [2.45]
203 [7.99]
347.8 [13.69]
404.5 [15.93]
MIO
3.5 [.14]
502 [19.76]
620 [24.41]
361.4 [14.23]
5 [.20]
45 [1.77]
PowerCON
TRUI TOP
3 [.12]
35°
35°
190 [7.48]
165 [6.50]
251.4 [9.90]
VISTA 3D / 3D VIEW
SPEAKER NX 932-A 220-240V
REV.
A

ACCESSORIES

	AC PMX POLE MOUNT M20	PART NUMBER EAN:	**13360232** 8024530010058
	AC PRO-FS PROFESS. LOCKING FLOOR STAND	PART NUMBER EAN:	**13360109** 8024530006471
	AC PRO-PM PROFESS. LOCKING POLE MOUNT	PART NUMBER EAN:	**13360110** 8024530006488
	COVER CVR NX 912	PART NUMBER EAN:	**13360496** 8024530019495
	INSTALL.PLT 2X PLATE H-BR NX 910-12-15	PART NUMBER EAN:	**13360506** 8024530020057
	KIT EYEBOLT 4 X	PART NUMBER EAN:	**13360031** 8024530018870
	POLE MOUNT KIT PM-KIT M20	PART NUMBER EAN:	**13360067** 8024530014599
	RAIN PROTECTION RP 001	PART NUMBER EAN:	**13360515** 8024530020460
	VERTICAL BRACKET V-BR TT 22 II	PART NUMBER EAN:	**13360328** 8024530013332