

NX 945-A

PROFESSIONAL ACTIVE SPEAKER

DESCRIPTION

NX 945-A is masterfully engineered from the ground up to deliver stellar audio performance for sound providers, small bands and DJs. The combination of a 4" titanium/neodymium compression driver, 15" neodymium woofer - two-channel 2,100W amplifier, and the constant directivity True Resistive Waveguide produces coherent 100° x 70° coverage for the listening area with up to 135 dB SPL, distortion-free sound. Used as a stand-alone speaker for a FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 945-A blends high performance and reliability in a compact package. Merging RCF proprietary FiRPHASE and Bass Motion Control DSP processing, perfectly tuned for each model, the audience will experience absolute sound clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.



FEATURES

- Up to 135 dB Sound Pressure Level
- 2100W Class-D Bi-Amplification
- 45-20000 Hz linear frequency response
- 4" Titanium/Neodymium Compression Driver
- 15" neodymium Woofer
- FiRPHASE zero degrees phase technology
- Bass Motion Control woofer excursion management
- Six M10 and four Quick Lock rigging points

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	45 Hz ÷ 20000 Hz
	Max SPL @ 1m	135 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.4" neo, 4.0" v.c
	Woofers	15" neo, 3.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	650Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Linear, Boost, Stage, Volume
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Hardware	2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear 2 each side quick lock pin seat
	Handles	1 x Side
	Pole mount/Cap	Yes
	Color	Black, White
Size	Height	705 mm / 27.76 inches
	Width	420 mm / 16.54 inches
	Depth	451 mm / 17.76 inches
	Weight	27.3 kg / 60.19 lbs
Shipping information	Package Height	751 mm / 29.57 inches
	Package Width	506 mm / 19.92 inches
	Package Depth	474 mm / 18.66 inches
	Package Weight	31 kg / 68.34 lbs

PART NUMBER• **13000876**

NX 945-A W
220-240V, White
EAN 8024530022037

• **13000875**


NX 945-A W
100-120V, White
EAN 8024530021887

• **13000769**

NX 945-A
100-120V, Black
EAN 8024530021665

• **13000768**

NX 945-A
220-240V, Black
EAN 8024530021122

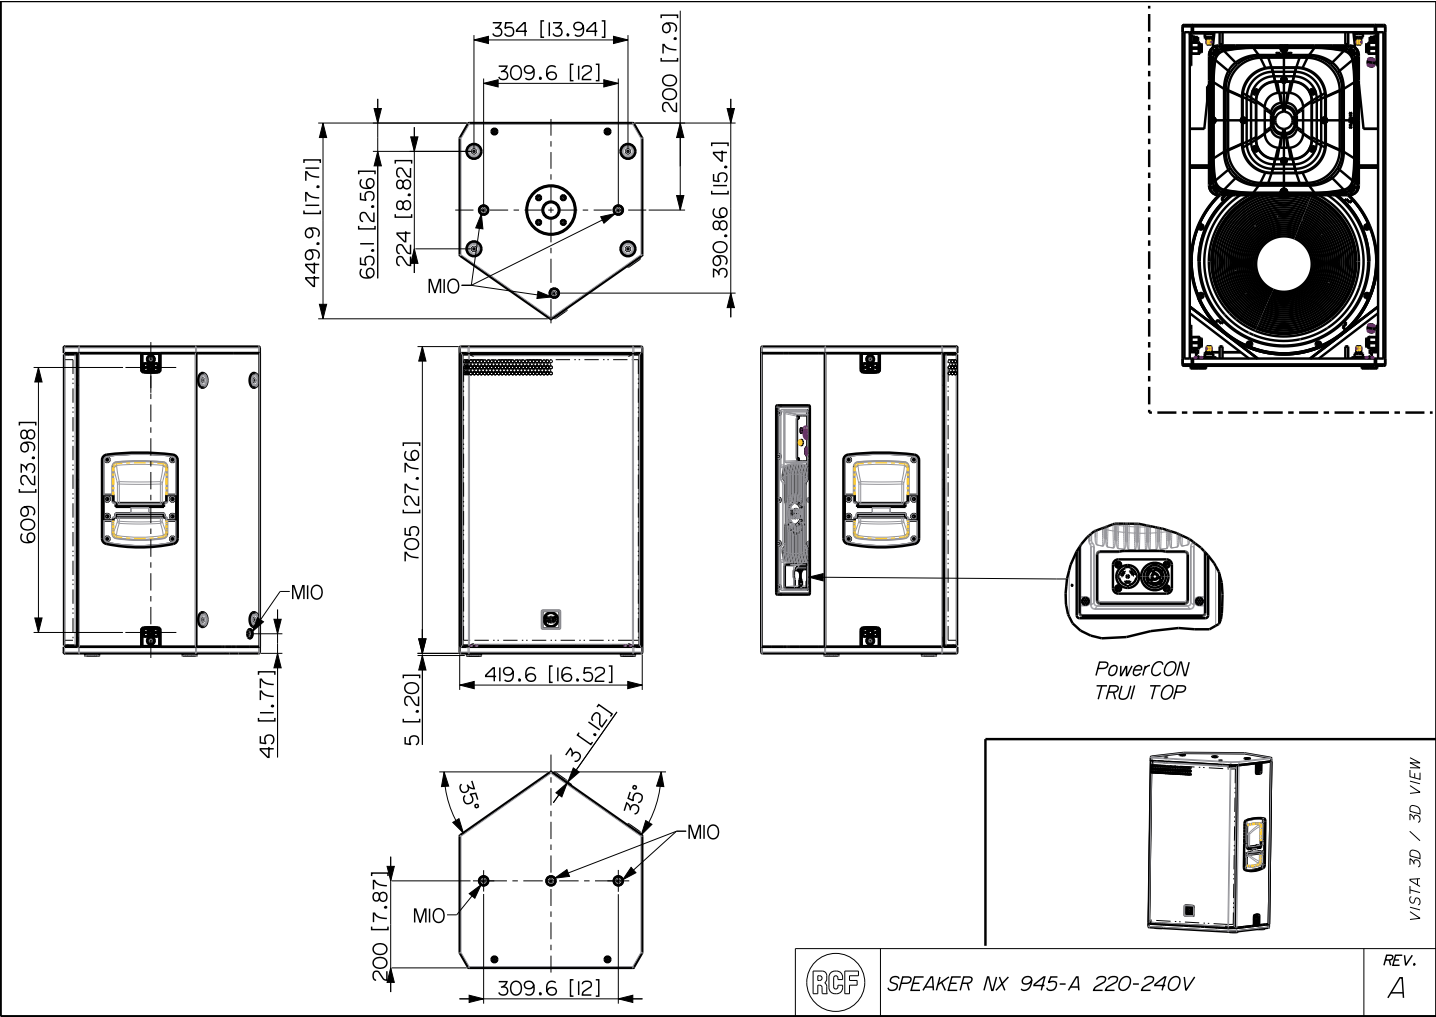

ACCESSORIES



AC PMX POLE MOUNT M20

PART NUMBER **13360232**
EAN: 8024530010058



AC PRO-FS PROFESS. LOCKING FLOOR STAND

PART NUMBER **13360109**
EAN: 8024530006471



AC PRO-PM PROFESS. LOCKING POLE MOUNT

PART NUMBER **13360110**
EAN: 8024530006488



COVER CVR NX 915

PART NUMBER **13360497**
EAN: 8024530019501



HORIZONTAL BRACKET H-BR 2X COMPACT C 45

PART NUMBER **13360493**
EAN: 8024530019938

INSTALL.PLT 2X PLATE H-BR NX 910-12-15

PART NUMBER **13360506**
EAN: 8024530020057



KIT EYEBOLT 4 X

PART NUMBER **13360031**
EAN: 8024530018870



POLE MOUNT KIT PM-KIT M20

PART NUMBER **13360067**
EAN: 8024530014599



RAIN PROTECTION RP 001

PART NUMBER **13360515**
EAN: 8024530020460



VERTICAL BRACKET V-BR NX 45

PART NUMBER

13360398

EAN:

8024530015510
