

The PE-64 is a pendant speaker designed for ceiling suspension installations. Considered in architectural design, it can blend in with lighting equipment. A directly-attached 5 m (16.4 ft) cable allows the speaker to be suspended from the high ceiling. The PE-64 is driven on high-impedance (100 V and 70 V) line. The input power (impedance) can be easily changed at the upper side of the speaker. The speaker is easy to repaint so as to meet a wide range of design needs.





Order no: PE-64


Specifications

| | |
|-----------------------------------|--|
| Frequency response | 100 Hz - 18 kHz |
| Connection | Push-in connector (bridging terminal - 2 branch type) |
| Sensitivity (1#V, 1#m) (combined) | 90 dB (500 Hz – 5 kHz, pink noise) |
| Speaker component | 12 cm cone-type |
| Rated input | 6 W |
| Tappings | 100V LINE: 1.7kΩ (6W), 3.3kΩ (3W), 10 kΩ (1W) 70V LINE: 1.7kΩ (3W), 3.3kΩ (1.5W), 10 kΩ (0.5W) |
| Rated impedance | 100 V, 70 V, 8 Ω |
| Weight | 1,5 kg |
| Certificates | Ease |
| Dimensions (W x H x D) | x 251 |
| Dimensions (ø x D) | 186 |
| Gross weight | 2,9 kg |
| Finish | HIPS resin, off-white (RAL 9010 or equivalent) |

Appearance

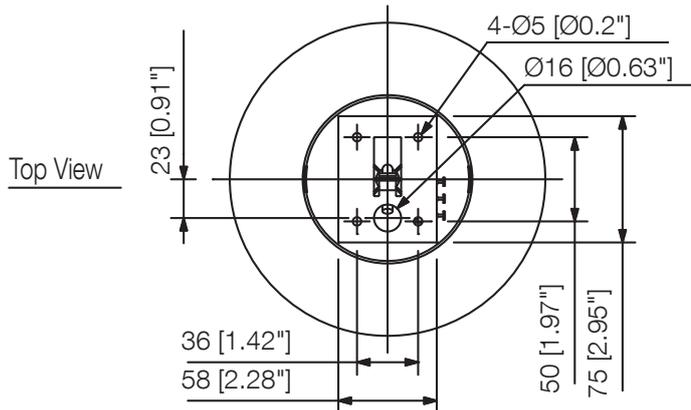


Front View

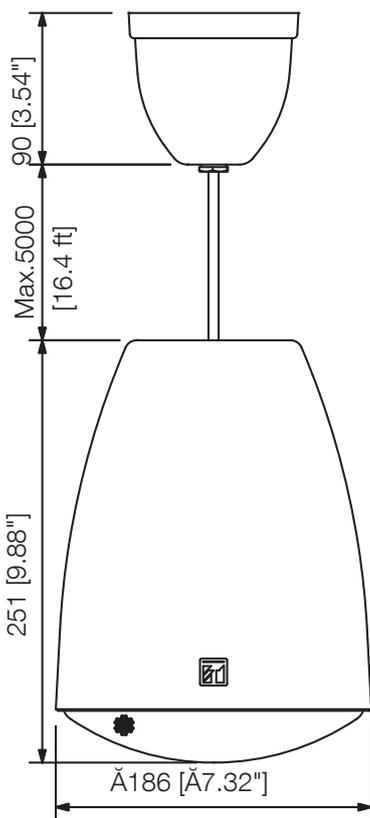

UNIT:mm

SCALE:1/5

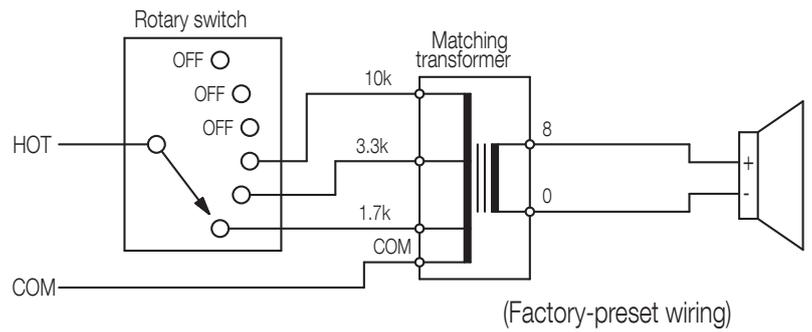

Wiring Diagram

