

PL 40

CEILING SPEAKERS

DESCRIPTION

PL 40 is a ceiling speakers featuring elegant and innovative design that can be flushmounted in false ceilings or panels. Incorporating a 3.5" fullrange transducer, PL 40 is equipped with a line transformer that enables direct connection to constant voltage systems at 70 V or 100 V. The multiple sockets on the transformer make possible to select the output power from among several values. Installation is quick and easy thanks to a special three-hook system that avoids the need for using screws and pallet or other attachment elements.



FEATURES

- 3.5" fullrange transducer
- Power selectable (100 V): 8 W – 6 W – 4 W – 2 W
- 88 dB sensitivity
- Colour white RAL 9003
- Plastic frame UL 94 V0, steel grille

TECHNICAL SPECIFICATIONS



Acoustical specifications	Frequency Response (-10dB):	90 Hz ÷ 20000 Hz
	Max SPL @ 1m:	100 dB
	Coverage angle:	120°
	System Sensitivity:	88 dB
Power section	Power Handling:	8 W RMS
	Peak Power Handling:	32 W PEAK
	Recommended Amplifier:	16 W
Transducers	Fullrange:	3.5"
Input/Output section	Input connectors:	Screw Terminals
	Output connectors:	Screw Terminals
	Constant Voltage Transformer:	100 V
	Power selection 1 (100 V):	8 W - 1250 ohm
	Power selection 2 (100 V):	6 W - 1667 ohm
	Power selection 3 (100 V):	4 W - 2500 ohm
	Power selection 4 (100 V):	2 W - 5000 ohm
Standard compliance	IP protection grade:	IP 44
	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Plastic
	Hardware:	Plastic Material
	Grille:	Steel
	Color:	White - RAL 9003
Size	Depth:	110 mm / 4.33 inches
	Recessed Depth:	103 mm / 4.06 inches
	Diameter:	130 mm / 5.12 inches
	Cut out diameter:	122 mm / 4.8 inches
	Weight:	0.38 kg / 0.84 lbs
Shipping informations	Package Height:	120 mm / 4.72 inches
	Package Width:	175 mm / 6.89 inches
	Package Depth:	175 mm / 6.89 inches
	Package Weight:	1.2 kg / 2.65 lbs




PART NUMBER

- **13133045**

PL 40

EAN 8024530004989

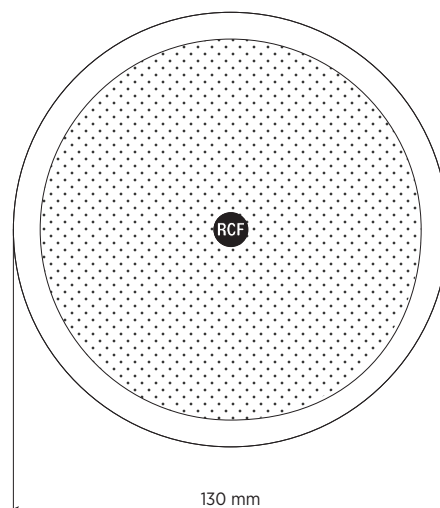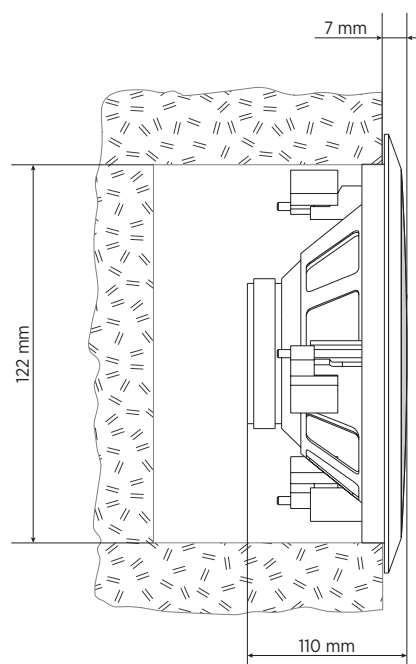DRAWINGS

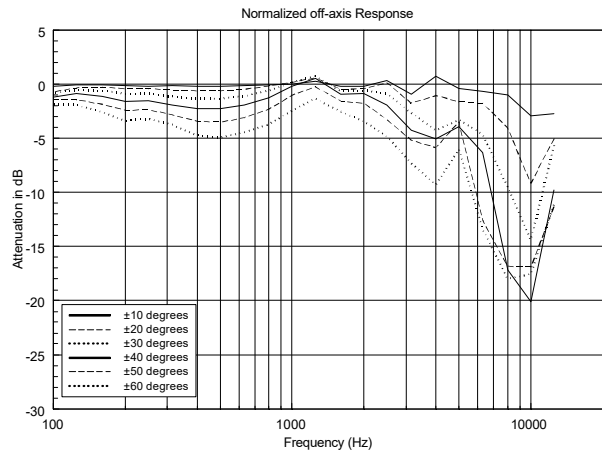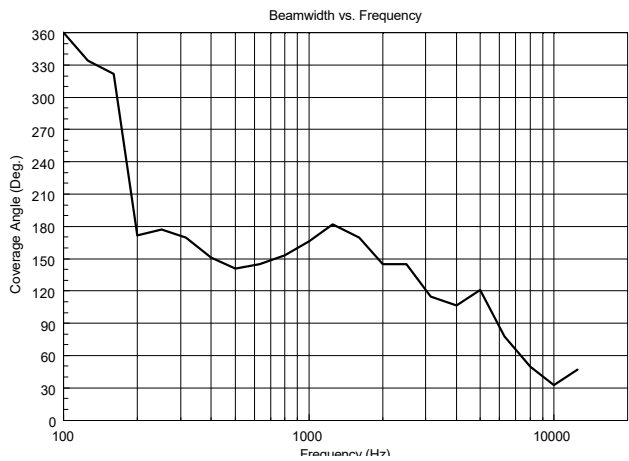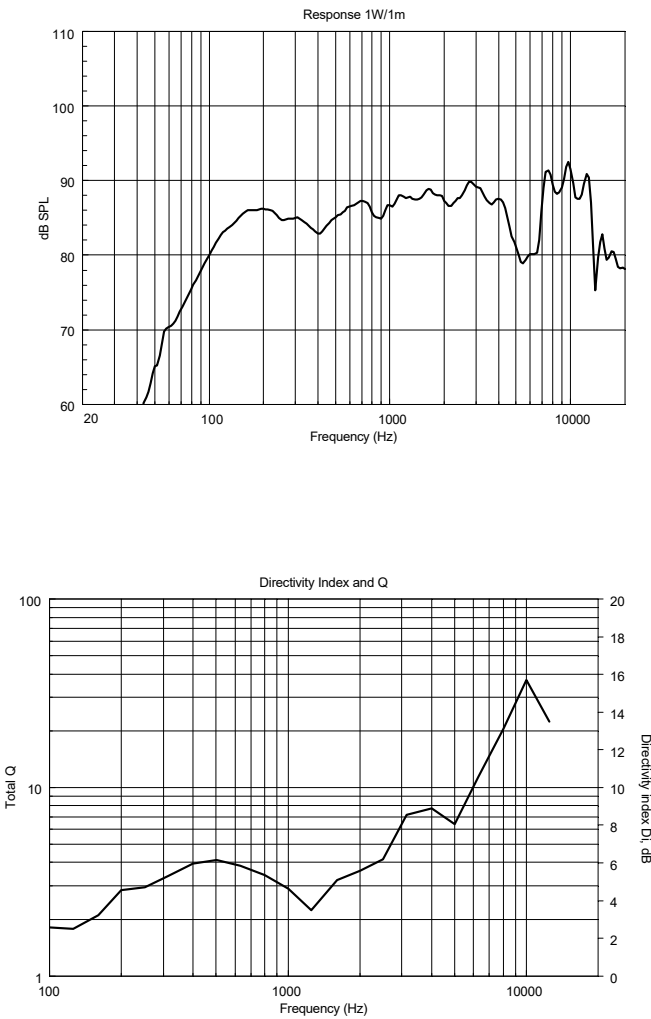

HORIZONTAL 1/3 POLAR PLOT

