


MICROPHONE

PM-222 PM-222D PM-222U

■ GENERAL DESCRIPTION


The PM-222 series is a close-talking microphone for making general announcements. It comes with a talk switch that can be locked. The PM-222D and PM-222U are provided with the function to remotely control both the amplifier power and chime operation. Refer to the amplifier instruction manual for details of the remote control function and connections to the amplifier.

■ APPEARANCE

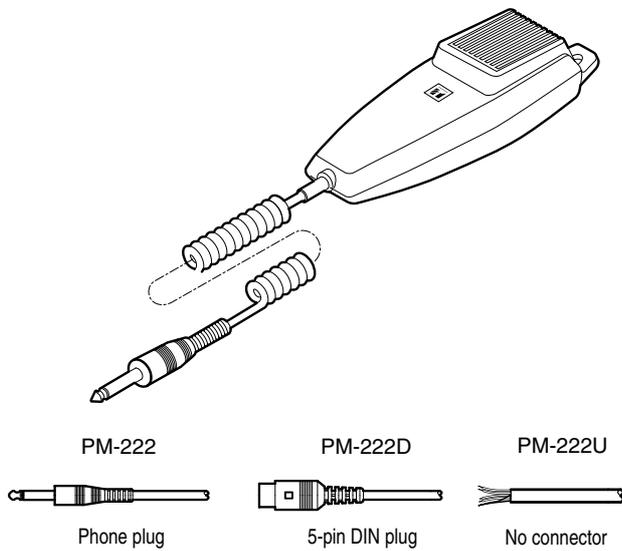


■ CIRCUIT DIAGRAM

• PM-222

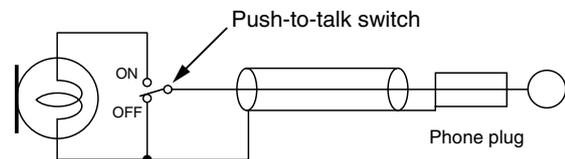

• PM-222D/U

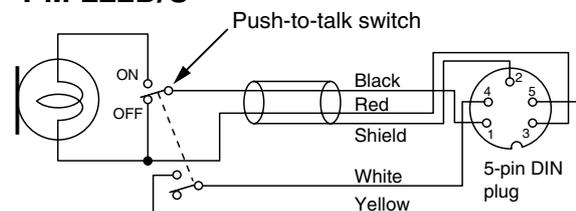

■ SPECIFICATIONS

Note: The PM-222U is equipped with no connector.

Model No.	PM-222	PM-222D/-222U
Type	Moving coil microphone	
Directivity	Unidirectional	
Rated Impedance	600 Ω, unbalanced	600 Ω, balanced
Rated Sensitivity	-47 dB (1 kHz 0 dB=1 V/Pa)	
Frequency Response	100 Hz-10 kHz	
Cable	1-core shielded cable	2-core shielded plus 2-core cable
Cable length	2 m (when extended)	
Terminal	Phone plug	PM-222D: 5-pin DIN plug PM-222U: No connector
Weight	200 g	
Dimensions	44 (w) x 160 (h) x 38 (d) mm	
Talk switch	Short-off type with lock	
Remote switch	—	Make contact (linked with talk switch)
Finish	ABS resin, gray	

* This specification is subject to change without notice.

• Accessories

- Microphone holder 1
- Microphone holder metal fitting 1
- Microphone holder screw 2