


DATA SHEET

VOLTERA® A SERIES

COMPACT 2 / 4-CHANNEL, 300 / 600W AMPLIFIER MODELS

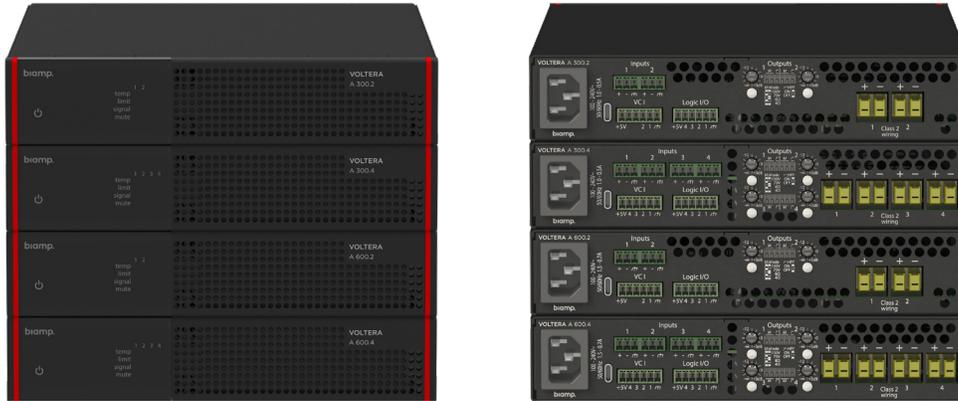

The Voltera® A Series are four half-rack power amplifiers with a total power of 300 or 600 W delivered by two or four channels in a sleek, compact design. The amplifier channels are extremely flexible in that they can individually be selected to drive either 4 ohm, 8 ohm, 70 V or 100 V. They also support power sharing so that up to twice the power can be delivered by any channel. Every A Series amplifier ships with mounting accessories for a variety of mounting options.

The A Series is ideal for restaurants, hotels, bars, education, small houses of worship, corporate or other applications where sound distribution or reinforcement is needed.

BENEFITS

- Compact design for versatile placement
- Quick and easy installation
- Low heat emission (designed to become Energy Star certified)
- Perfectly matched for Tesira applications, but also compatible with a wide variety of third-party speakers

FEATURES

- Half width allows single or tandem mounting in 1 RU¹. Can be mounted in a variety of other locations (under tables, on walls behind screens/monitors, in ceilings, on shelves in credenzas)¹
- Default 4 dBu input sensitivity no matter what load means that it is easy to drive with any source
- Includes manual per channel configuration: Mode switches for Lo/Hi-Z, Gain trim² and high-pass filter option
- The high power capability necessitates fans, but they are thermally controlled and support whisper mode for normal operation
- Comes with Tesira processing blocks for relevant Biamp loudspeakers
- Auto standby mode
- Each channel can drive up to twice its rated power
- CE marked, UL listed, and RoHS compliant
- Covered by Biamp Systems' five-year warranty

¹: Using included accessories

²: The Gain trim can boost both the gain and the power by up to 3 dB

VOLTERA A SERIES SPECIFICATIONS

Model	A 300.4	A 300.2	A 600.4	A 600.2
Output section				
Total output all channels driven	300 W	300 W	600 W	600 W
Number of channels	4	2	4	2
Maximum output voltage	147 Vpk	147 Vpk	147 Vpk	147 Vpk
Maximum output current	13 Apk	16 Apk	16 Apk	20 Apk
Power per channel all channels driven				
100/70V	75 W	150 W	150 W	300 W
8 ohm	75 W	150 W	150 W	300 W
4 ohm	75 W	150 W	150 W	300 W
Max power per channel using power sharing ¹				
100/70V	150 W	300 W	300 W	600 W
8 ohm	150 W	300 W	300 W	600 W
4 ohm	150 W	300 W	300 W	600 W
¹: Available on any channel if the trim is set to +3 dB				
THD+N (20 - 20000 Hz for 1 W into 8 ohm)	<0.5%			
THD+N (1 kHz, 1 dB below clip)	<0.008%			
Frequency response (20 - 20000 Hz, 8 ohm, unweighted)	+/-0.5 dB			
Signal to Noise ratio (8 ohm)	>103 dBA			
Channel separation (crosstalk at 1 kHz)	>75 dB			
Input impedance (balanced)	8 kohm			
Input sensitivity (for all Mode options) ²	+4 dBu (1.23 Vrms)			
Max input level	+24 dBu			
Gain for 70 / 100 V ³	35.2 / 38.2 dB			
Gain for 8 ohm ³	26 dB	29 dB	29 dB	32 dB
Gain for 4 ohm ³	23 dB	26 dB	26 dB	29 dB
²: With the gain trim set at 0 to +3 dB				
³: With the gain trim set at 0 dB				
Front panel indicators				
temp	Amplifier channel and power supply temperature			
limit	Shows if the limiters are engaged			
signal	Signal status per channel			
mute	Shows if the mute input is engaged			
power	Shows if it is on / standby			
Rear panel controls/indicators				
Signal level indicator	Signal level and limiter action			
Mode switch / ch. (4 Ω / 8 Ω / 70 V / 100 V)	Defines the gain and the limiter thresholds			
High pass filter	70 Hz 12 dB/octave (on/off)			
Gain trim (default 0 dB)	In addition to reducing the gain down to -infinity, it can boost the gain and power by up to 3 dB			
Control/monitoring IO				
	Mute all channels (input)			
	Health (output)			
	Sleep mode status (output)			
	Sleep mode (input)			

VOLTERA A SERIES SPECIFICATIONS

Included accessories	Rack solution for single/tandem 19" 1 RU mount Brackets for mounting under table/on wall/under ceiling
Overall dimensions	
HxWxD	1.7 x 8.7 x 11.4 inches (44 x 220 x 290 mm)
Weight	6.1 lbs (2.7 kg)
Cooling	Variable speed fans, front to back airflow
Environmental	
Operating temperature	32-104°F (0-40°C)
Relative humidity	0-95% non-condensing
Power	100-240 VAC, 50/60 Hz
Standby	<1 W (designed to meet Energy Star requirements)

Subject to change without prior notice

Biamp and Voltera are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.



 biampinfo@biamp.com

 +1 503 641 7287

 www.biamp.com

BIADS-1074-2203-EN-R1