


# TA1000 VSA

100V TRANSFORMER FOR VSA ACTIVE SPEAKERS

## DESCRIPTION

TA 1000 is an accessory that consists of a small printed circuit board with a transformer that allows the connection of a 100 V line (amplifier output) directly to the aux audio input (0 dBu) of an active speaker.

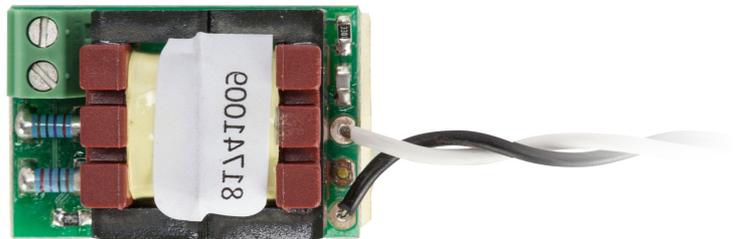

## FEATURES

- Compact installation within speaker's input panel

**TECHNICAL SPECIFICATIONS****General specifications**

Input voltage:	100 V - 70 V
Output voltage:	0.1 ÷ 1 V
Frequency response:	40 Hz ÷ 16000 Hz (± 1 dB)
Distortion:	= 0.3%
Input connection:	Screw terminals
Output:	0 dBu with settled black-white cable (10 cm) with section 2 x 0.25 mm <sup>2</sup>
Mounting:	Double-coated, open-cell urethane foam tape, thickness 3.2 mm
Compatible models:	VSA 850, VSA 1250, VSA 2050

**Standard compliance**

CE marking:	Yes
-------------	-----

**Size**

Weight:	0.05 kg / 0.11 lbs
---------	--------------------

**Shipping informations**

Package Height:	75 mm / 2.95 inches
Package Width:	140 mm / 5.51 inches
Package Depth:	70 mm / 2.76 inches
Package Weight:	0.8 kg / 1.76 lbs

**PART NUMBER**

- **13360318**

TA1000 VSA

EAN 8024530012878