

ZM-9013

REMOTE CONTROL PANEL

Designed for exclusive use with the 9000M2 Series amplifier or M-864D, the ZM-9013 is a wall mounted remote control panel having 8 buttons. It is used in conjunction with the RC-001T Remote control module or M-864D. It can be mounted in a standard 2-gang electrical box in the wall.



Article number: ZM-9013
 Alternative products: ZM-9011, ZM-9012,
 ZM-9014


Specifications

Applicable cable	Shielded CPEV cable (paired data line and paired power line) or CAT5 twisted pair cable for LAN
Power source	24 V DC (supplied from RC-001T)
Current consumption	0,1 A
Indicator	8 function indicators
Dimensions (W x H x D)	72 x 127 x 50,5 mm
Dimensions (ø x D)	x 50,5 mm
Finish	Steel plate, surface-treated, paint, white,

ZM-9013

REMOTE CONTROL PANEL

Appearance

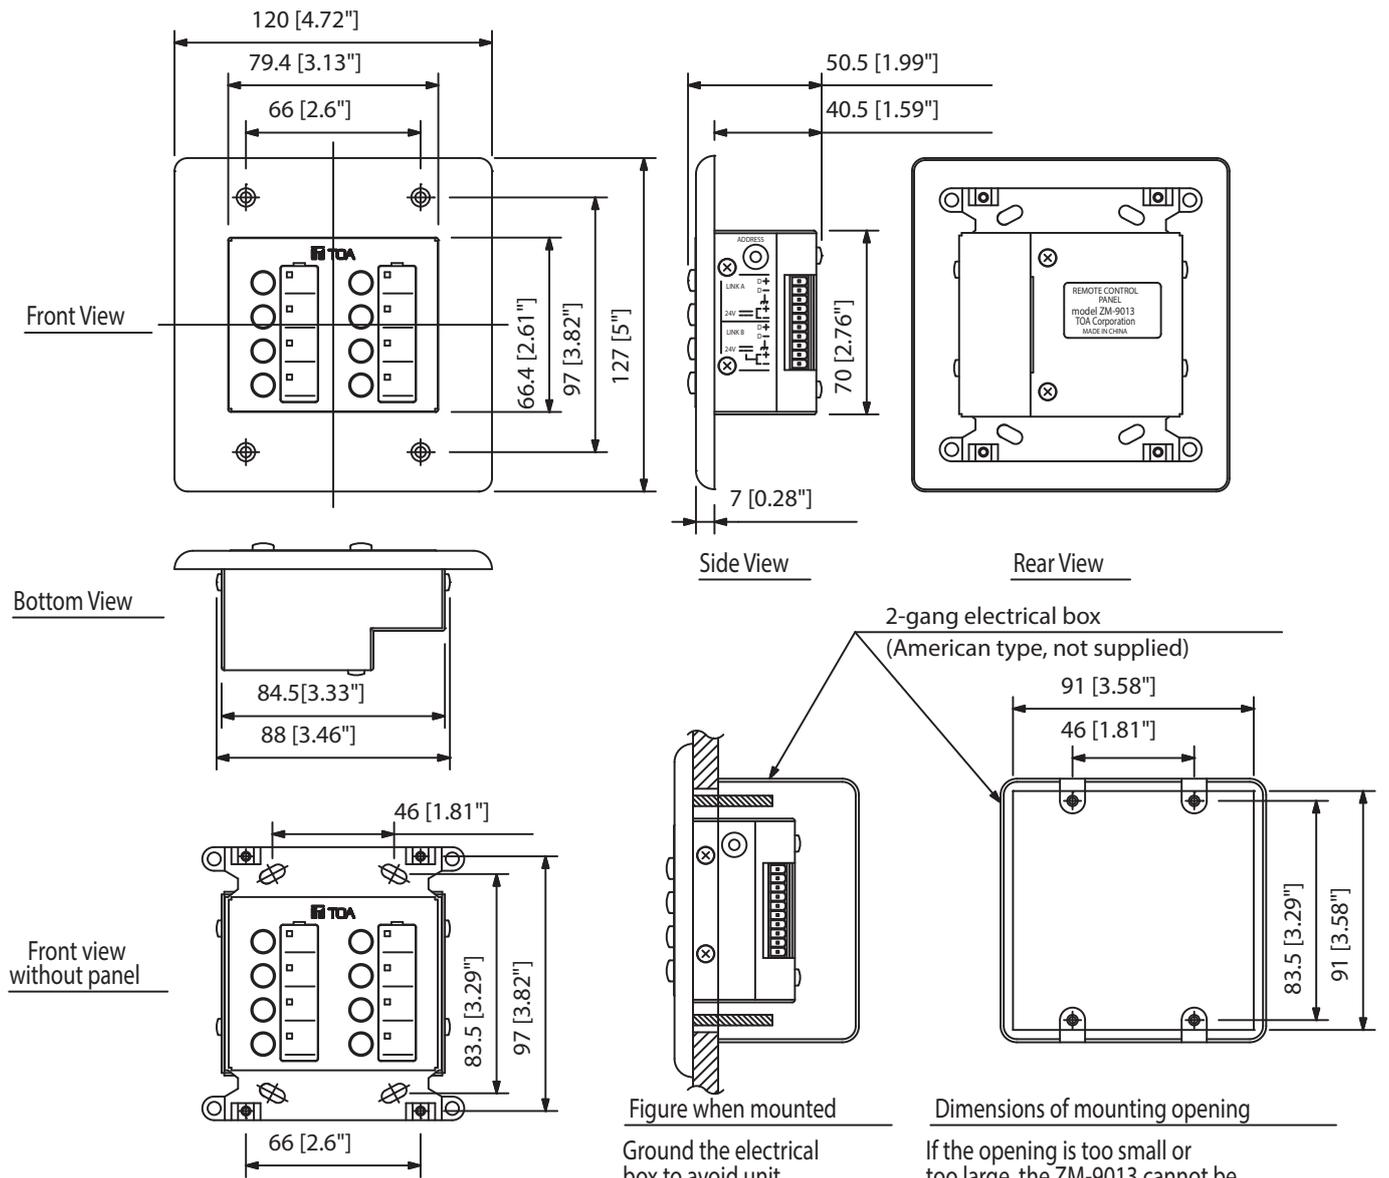

UNIT:mm

SCALE:1/3

Ground the electrical box to avoid unit malfunction due to static electricity.

If the opening is too small or too large, the ZM-9013 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.