

# P3 PowerPort 1500

## Acoustic Test Report



©2017-2020 HARMAN Professional Denmark ApS. Information subject to change without notice. HARMAN Professional and all affiliated companies disclaim liability for any injury, damage, direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document.

Martin®, HARMAN® and all other trademarks in this document pertaining to services or products by HARMAN Professional or its affiliates and subsidiaries are registered as the property of HARMAN Professional Denmark ApS.

HARMAN Professional Denmark ApS - Olof Palmes Allé 44 - 8200 Aarhus N - Denmark - [www.martin.com](http://www.martin.com)

## Title

P3 PowerPort 1500 Acoustic Test Report

## Test conditions

Test carried out according to ISO 3744:2010(E)

## Device tested

Make: HARMAN Professional Denmark ApS

Model: P3 PowerPort 1500

Serial no: 0344680009

Software version: 1.2.0

## Results

An image of the test setup can be found on Page 4. Test results are listed in Table 1 on Page 6. Figures of measurement results are shown in Appendix A on Page 8.

HARMAN Professional Denmark ApS, R&D QA are responsible for the test results given in this report.

## Environment

Temperature: 24.0°C Ta

Humidity: 60 %RH

AC mains power: 230 V, 50 Hz

Background noise level: 17.4 dBA

Warm-up time: 30 minutes at each test scenario

Fixture placement: Fixture was placed at least one meter from walls and ceiling, as described in the Standard ISO 3744:2010(E)

## Remarks

Test results apply only to the tested specimen.

Rev: (last five)	Made by:	Description:	Approved by:	Date approved:
A	Dana Yang	P3 PowerPort 1500 Sound Measurement	Verlinden Wouter	2020-12-16

## Setup

The product was placed indoors in a semi-anechoic room in the internal Lab of Harman Technology in Shenzhen, China (See Figure 1). The ceiling and walls were all acoustically absorbent and the floor was reflective. The main dimensions of the room were 5.9m \* 4.9m \* 3.3m (length \* width \* height).

HARMAN Professional Denmark ApS




**Figure 1: Test setup**

The product was allowed a minimum 10 minutes of warm-up time before measurements were performed.

## Measurement method

Measurements were carried out using a setup with 1 microphone. The microphone was in turn moved to the measurement positions described below.

Measurement setup at hemispherical measurement model, as Fixture 2

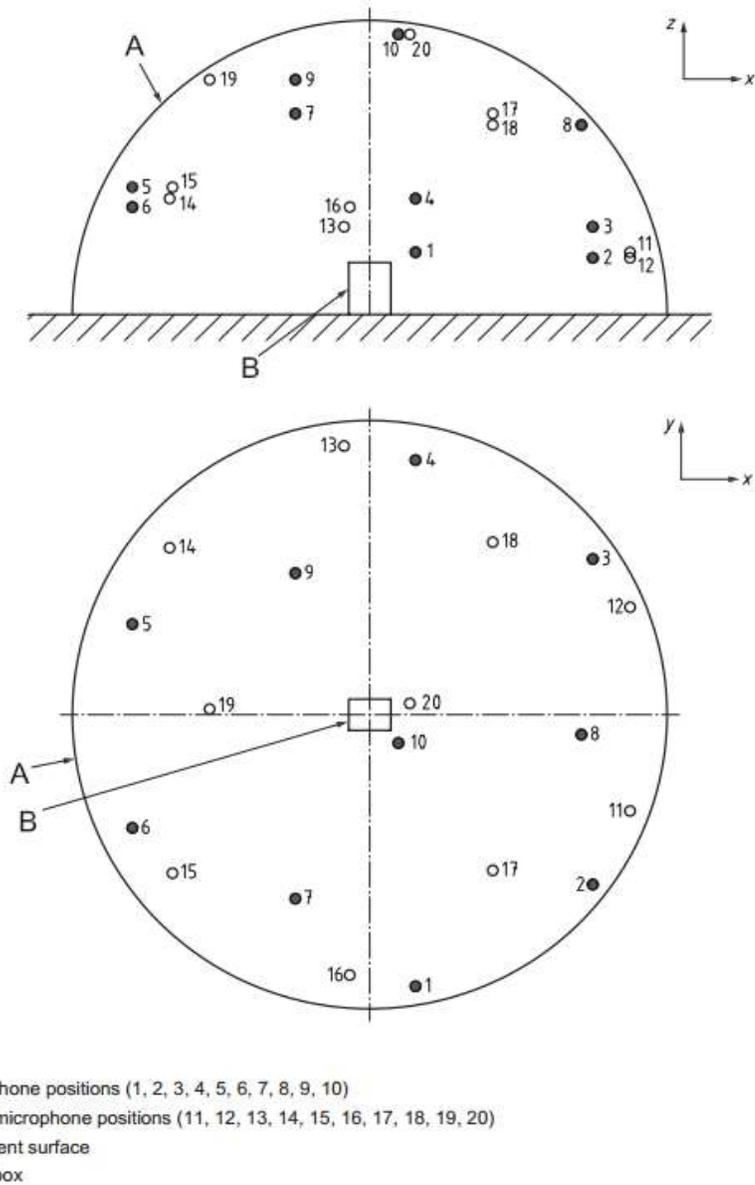

**Figure 2: Microphone Positions**

Note:

1.  $R=1.5\text{m}$ .
2.  $S=2 \pi R^2$ , Measurement surface area:  $14.14 \text{ m}^2$ .
3. 10 key microphones were taken measurement, as the range of A-weighted sound pressure levels measured at position 1 to 10 does not exceed 10 dB, additional 11 to 20 can be not considered.
4. The dimensions of the reference box: 33.5 cm x 48.2 cm x 8.8 cm.

## Instrumentation

Please refer to Page 8 for a full instrumentation list.

## Results

The P3 PowerPort 1500, connecting electronic load box, was measured in 3 different scenarios, which are simulated the different normal working status:

1. No load on P3 PowerPort 1500
2. 33% load on P3 PowerPort 1500 (each output loaded with 2.5A @ 48Vdc)  
– Equivalent to typical video content
3. 100% load on P3 PowerPort 1500 (each output loaded with 7.5A @ 48Vdc)  
– Equivalent to connected fixtures in full white

Test positions and sound pressure levels are shown in Table 1.

Distance from fixture	No Load [ dB(A) ]	33% Load [ dB(A) ]	100% Load [ dB(A) ]
LpA at 0m	22.9	35.1	59.4
LpA at 1m	14.9	27.1	51.4
LpA at 4m	2.9	15.1	39.4
LpA at 7m	-2	10.2	34.5

The duration of the acoustical measurement for each position is 30s.

After calculated the time-averaged sound pressure levels of all positions and background noise, the difference between the two values is more than 15dB, therefore no correction for background noise shall be applied.

**Table 1: Sound Pressure Levels**

Sound Pressure Levels have been converted from Sound Power Levels using the formula:  $LpA = (LWA - \text{reduction}_{\text{distance}})$

Reductions used: 8dB(A)@1m, 20dB(A)@4m, 24.9dB(A)@7m

## Noise level details

Appendix A displays measurement detail of noise level in 100% Load test scenario.

## Instrumentation

Equipment	Maker	Type
Harman	NTi Audio	NTi XL2 A2A-14709-E0
Harman	NTi Audio	MIC MA220 No.7587
Harman	Chroma	Chroma 6314A Load
Harman		Semi-anechoic room
Harman		Digital Barometer
Harman		Data logger for atmosphere & environment


**Table 2: Instruments Used**

Appendix A: Measurement of Noise Level in 100% Load test scenario.


Position 1




Position 2

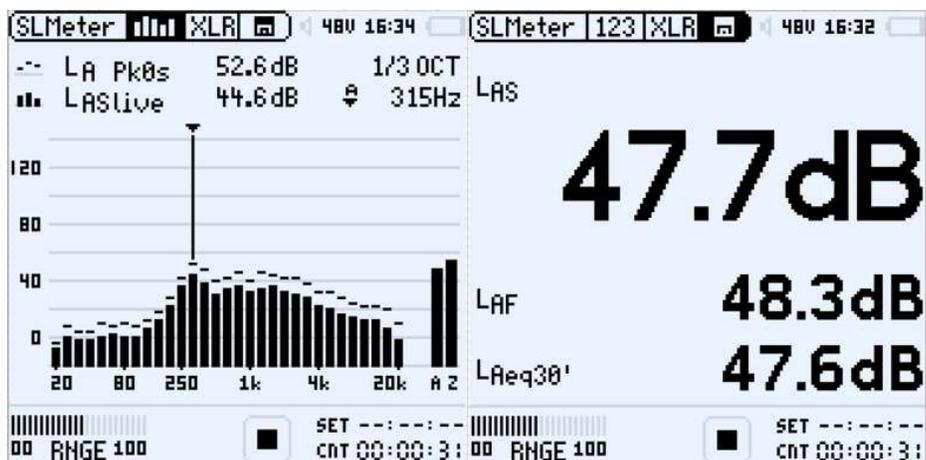


Position 3

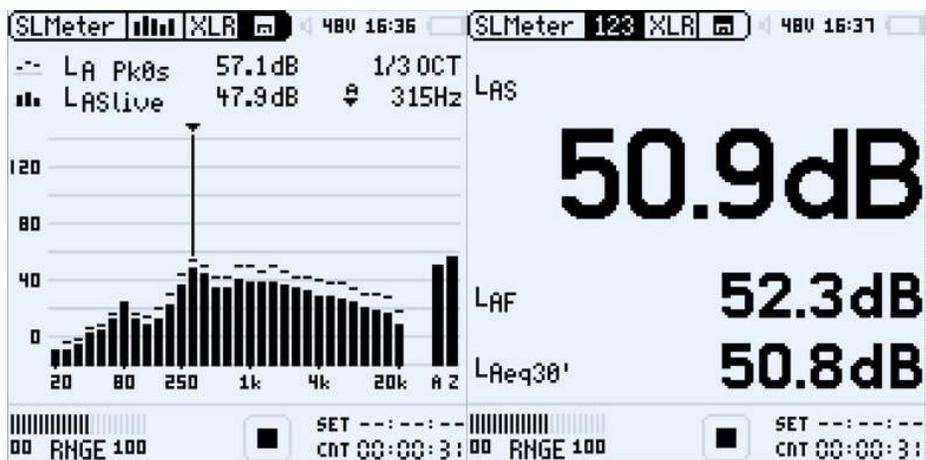


Position 4

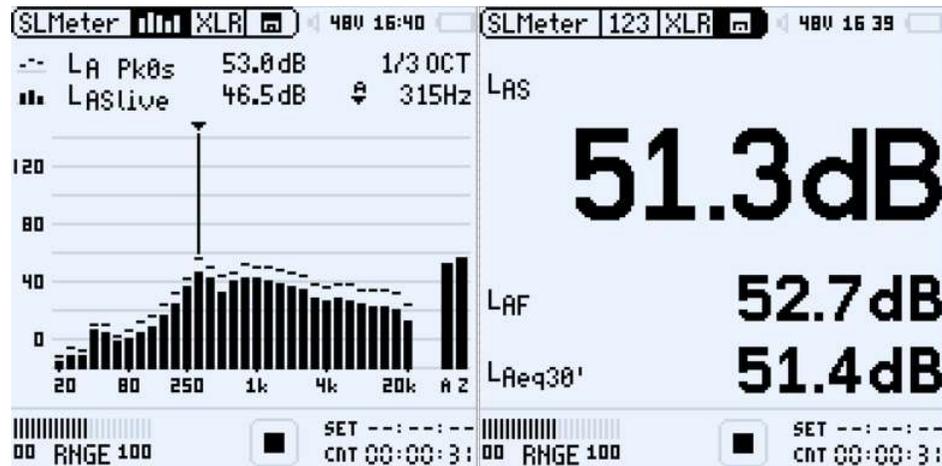


Position 5

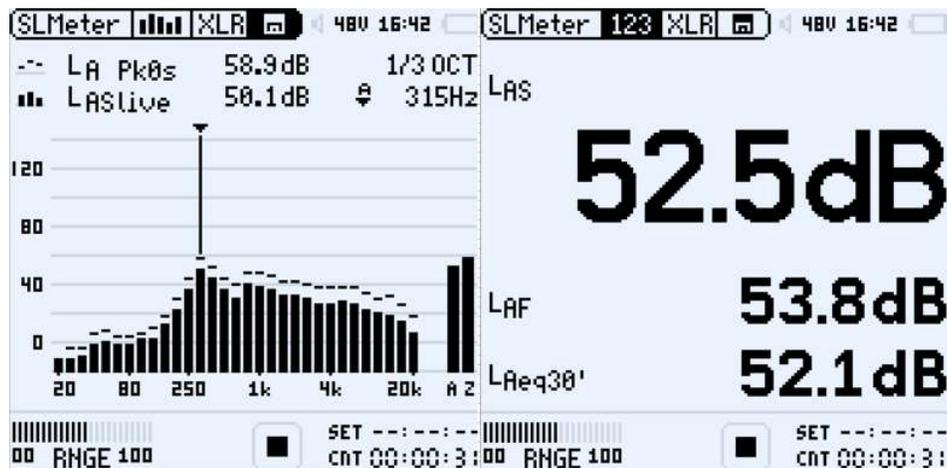


Position 6

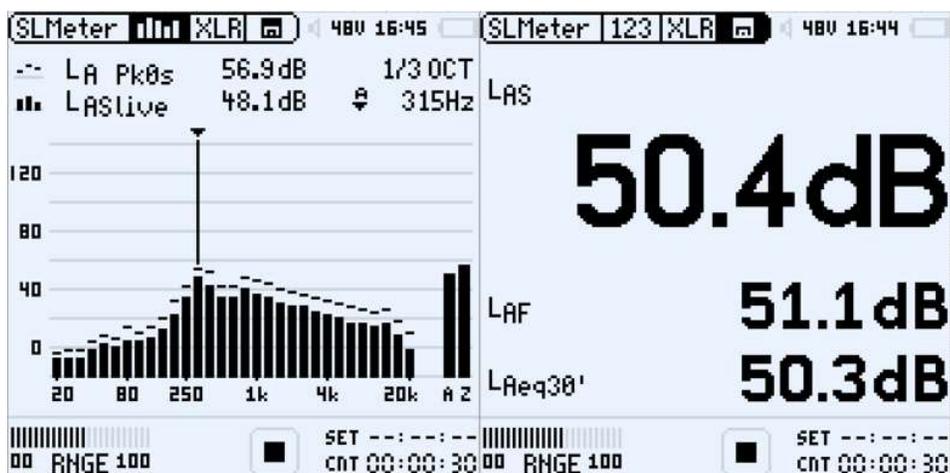


Position 7

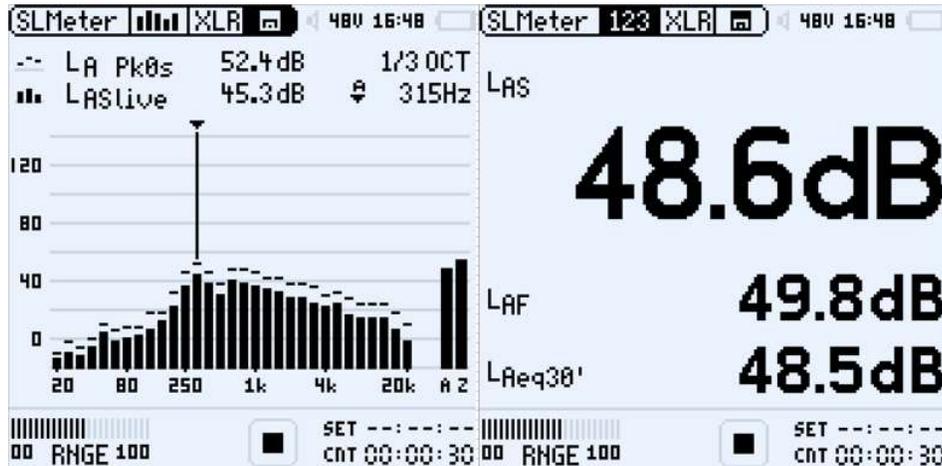

Position 8

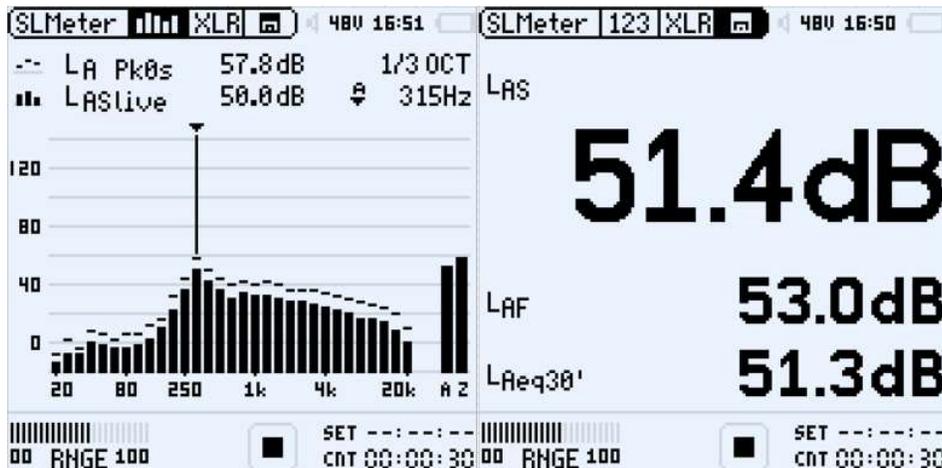

Position 9

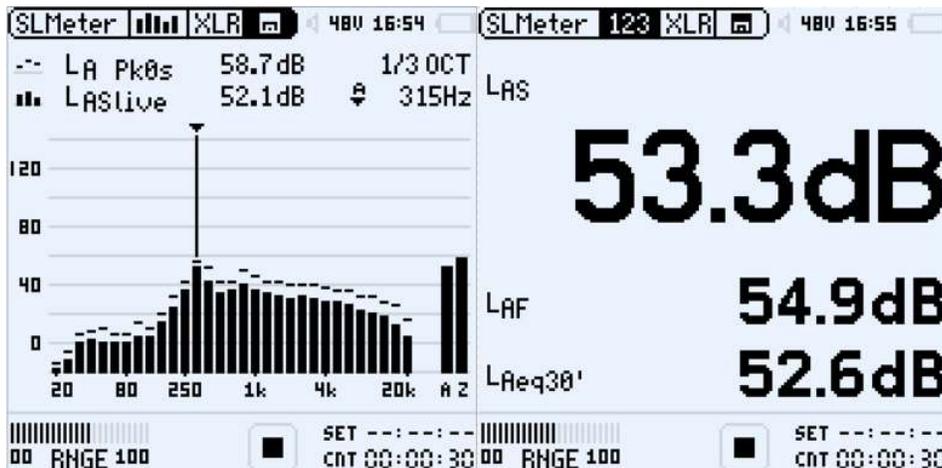

Position 10

